




## Tough Technology Products

Eaton Place Business Centre, 114 Washway Road, Sale  
Cheshire, M33 7RF, England  
Tel: 0800 772 0996

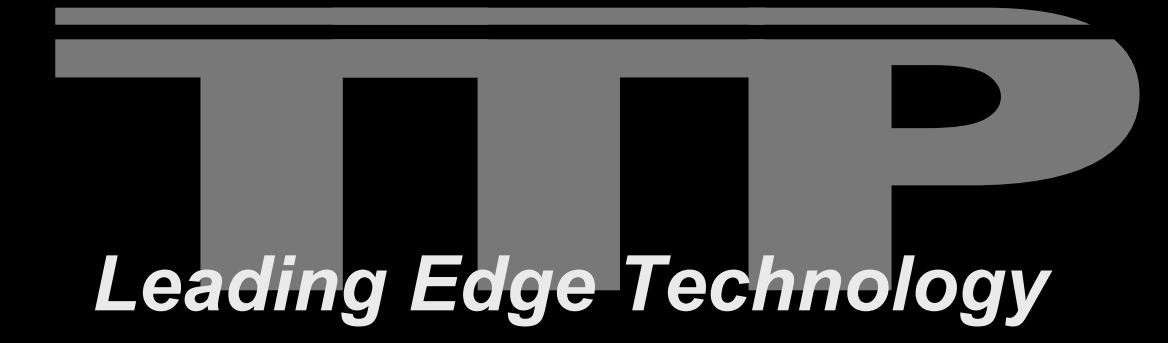

# OG-50

OG50 spray penetrates as an oil  
sets as a grease in 50 seconds

Part No OG50

## Product Description

OG50 Lubrication from TTP Ltd OG50 spray penetrates as an oil sets as a grease in 50 seconds to leave a lasting protective coating which is resistant to water, salt and solvents.

## Typical Applications

OG50 Penetrating Oil and Lubrication is ideal for use on Chains, cables, locking mechanisms, hinges, wire ropes and linkages.

## Application Features

OG50 Penetrates as an Oil then sets as a Grease in 50 seconds to leave a lasting protective coating which is resistant to Water, Salt and Solvents. It contains an anti-fling formula and with regular use will prevent corrosion. Ideal for use on Chains, cables, locking mechanisms, hinges, wire ropes and linkages.

## General Information

For safe handling of this product consult the Material Safety Data Sheet.


## Direction Of Use

Prior to use shake can well  
Spray onto area to be lubricated from a distance of 10-20cms  
OG50 will now set as a grease to provide lasting protection





**Tough Technology Products**  
Eaton Place Business Centre, 114 Washway Road, Sale  
Cheshire, M33 7RF, England  
Tel: 0800 772 0996

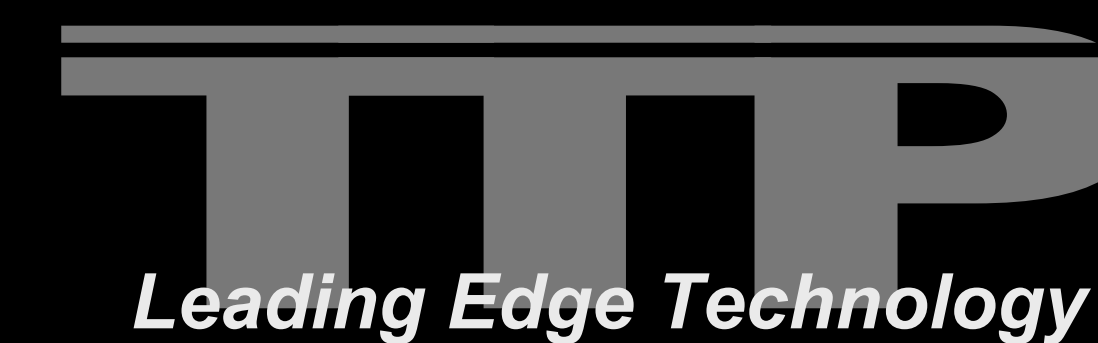

# OG-50

OG50 spray penetrates as an oil  
sets as a grease in 50 seconds

Part No OG50

## Physical & Chemical Properties

**FORM:** Aerosol  
**COLOUR:** Clear  
**ODOUR:** Aromatic

## Presentation

Aerosol: ... 400ml

## Storage

Store between 5 and 25°C in a dry, well ventilated place away from sources of heat, ignition and direct sunlight.

## Data Ranges

The data contained in this data sheet may be reported as typical value and/or range. Values are based on actual test data and are verified on a regular basis.

## Disclaimer

**IMPORTANT:** The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Tough Technology Products Limited expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; **NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN.** The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

Before handling this material, read and understand the MSDS (Material Safety Data Sheet) for additional information on personal protective equipment and for safety, health and environmental information.

